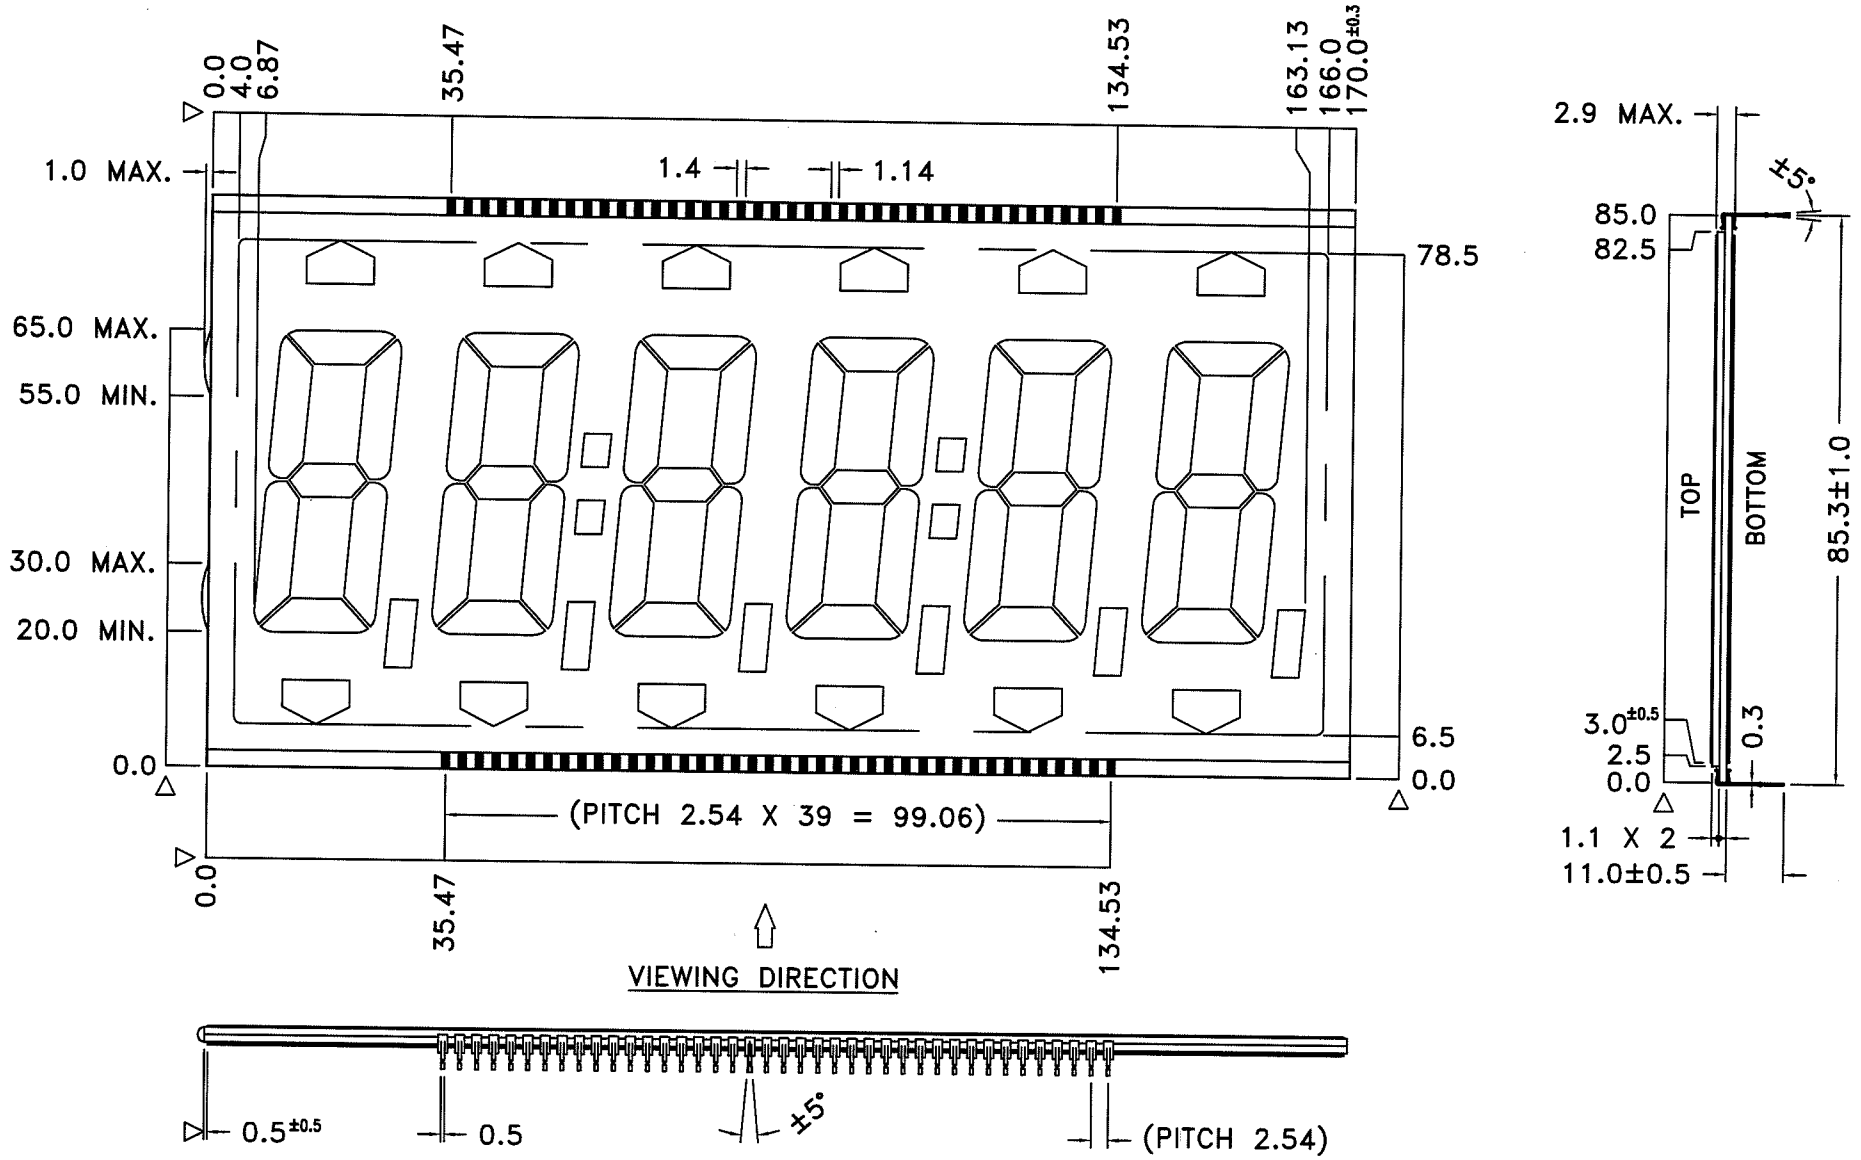

MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	02-APR-12
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE N.T.S		

PROJECTION

V5974Q

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY	Y.WEN	Leo	麦作良
DATE	02Apr,12	2 Apr 12	02 Apr 12
DRAWN BY : SH.Q.TAN		UNIT IN mm	OUR REF. 00

CLOVER DISPLAY LIMITED

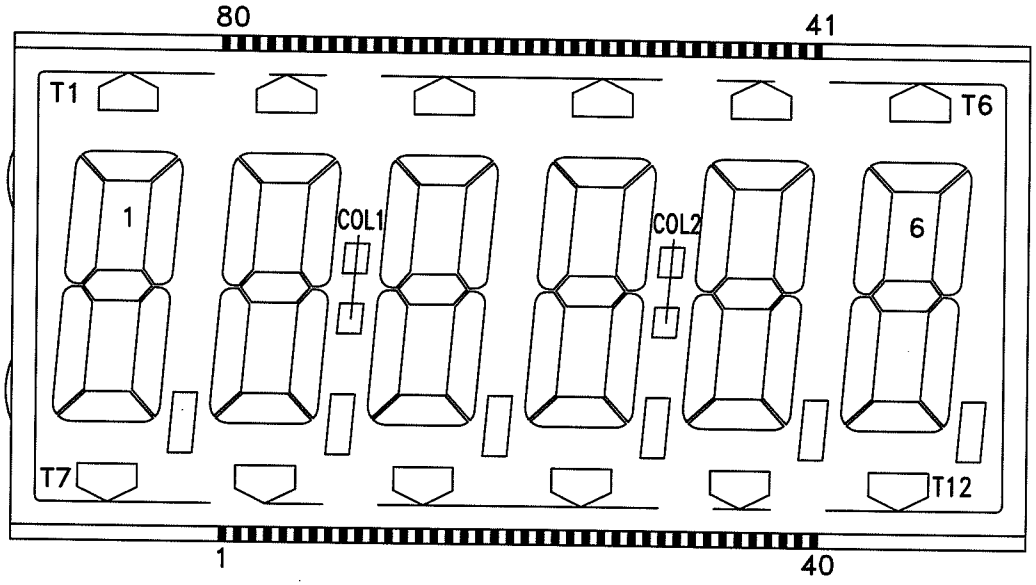

PIN	COM	PIN	COM	PIN	COM	PIN	COM
1	COM	21	4E	41	COM	61	/
2	/	22	4D	42	/	62	T3
3	1E	23	4C	43	T6	63	3B
4	1D	24	T10	44	6B	64	3A
5	1C	25	4DP	45	6A	65	3F
6	T7	26	/	46	6F	66	3G
7	1DP	27	5E	47	6G	67	COL1
8	/	28	5D	48	/	68	/
9	2E	29	5C	49	T5	69	T2
10	2D	30	T11	50	5B	70	2B
11	2C	31	5DP	51	5A	71	2A
12	T8	32	/	52	5F	72	2F
13	2DP	33	6E	53	5G	73	2G
14	/	34	6D	54	COL2	74	/
15	3E	35	6C	55	/	75	T1
16	3D	36	T12	56	T4	76	1B
17	3C	37	6DP	57	4B	77	1A
18	T9	38	/	58	4A	78	1F
19	3DP	39	/	59	4F	79	1G
20	/	40	COM	60	4G	80	COM

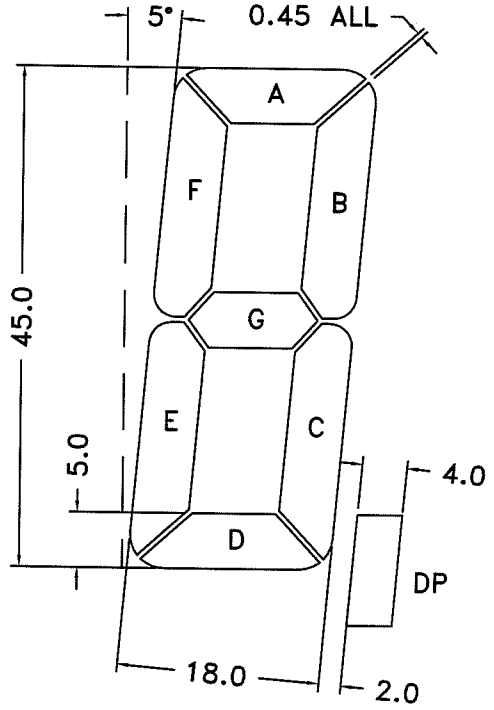

SCALE 3 : 2

CHARACTERISTICS :
1) OPERATING VOLTAGE : 5.0 V
2) OPERATING TEMPERATURE : −30°C TO 70°C
3) STORAGE TEMPERATURE : −40°C TO 80°C
4) DRIVING METHOD : STATIC
5) DISPLAY TYPE : EBTN / TRANSMISSIVE / NEGATIVE
6) VIEWING DIRECTION : 6 O'CLOCK

REV.	REVISION RECORD	DATE
00	1st ISSUE	02-APR-12

STANDARD
CUSTOMER REF.
SHEET 2 OF 2
SCALE N.T.S

PROJECTION

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY	Y.WEN	Leo	聂修泉
DATE	02Apr,12	2 Apr 12	02 Apr 12
DRAWN BY : SH.Q.TAN		UNIT IN mm	OUR REF. 00

V5974Q

CLOVER DISPLAY LIMITED