

FEATURES

- FHD (1920 x 1080 pixels) resolution
- Brightness – 250 nits (Typ.)
- Contrast ratio – 1000:1 (Typ.)
- Response time – 14ms (Typ.)
- Viewing angle – 178°(H)/178°(V), CR=10

SPECIFICATIONS

DISPLAY			
Item	Specification	Unit	Note
Display Area	476.064(H) x 267.786(V)	mm	
Pixel Number	1920 x R.G.B. x 1080	Pixel	
Display Colors	16.7M	Color	
Display Operation Mode	Transmissive Mode / Normally Black	-	

OPTICAL(without Touch glass)							
Item	Symbol	Min.	Typ.	Max.	Unit	Note	
Contrast Ratio	CR	700	1000	-	-		
Center Luminance of White	L _c	200	250	-	Cd/m ²		
Response Time	G to G	-	14	25	ms		
Viewing Angle	Horizontal	Right	85	89	-	Deg.	CR=10
		Left	85	89			
	Vertical	Upper	85	89	-		
		Lower	85	89			

VIDEO	
Input signal	Analog RGB (D-SUB 15 pin), HDMI, Displayport
Supported mode	Up to 1920 x 1080 @ 60Hz

ELECTRICAL	
DC Input voltage	12V _{DC} /3.5[A] ± 5%
Power consumption	25W (typ.) / TBD

PHYSICAL		* Please refer to the attached drawings for more information
Dimension	516.0(H) x 311.0(V) x 37.9(D) mm	
Weight	5.2 kg / TBD	

ENVIRONMENTAL	
Operating Ambient Temperature	0 to + 40°C
Storage Temperature	-20o + 60°C

TOUCH/Protection Glass (Optional)	
Projected capacitive Touch – USB Interface	※ Transmittance : 85%

* Specifications are subject to change without notice.


* Even if this product isn't subject of EU ErP(Energy related product), but we give effort to meet energy efficiency standard(ErP).

MODEL

TLK-215

* Specifications and drawing are subject to change.
 * Do not block the vent hole.
 No additional cover on the vent hole should be used.
 It is recommended to have enough space for air circulation.

REV.	ECO No.	DESCRIPTION	DATE	APP'L
0.90		PRODUCTION RELEASE	21.02.17	

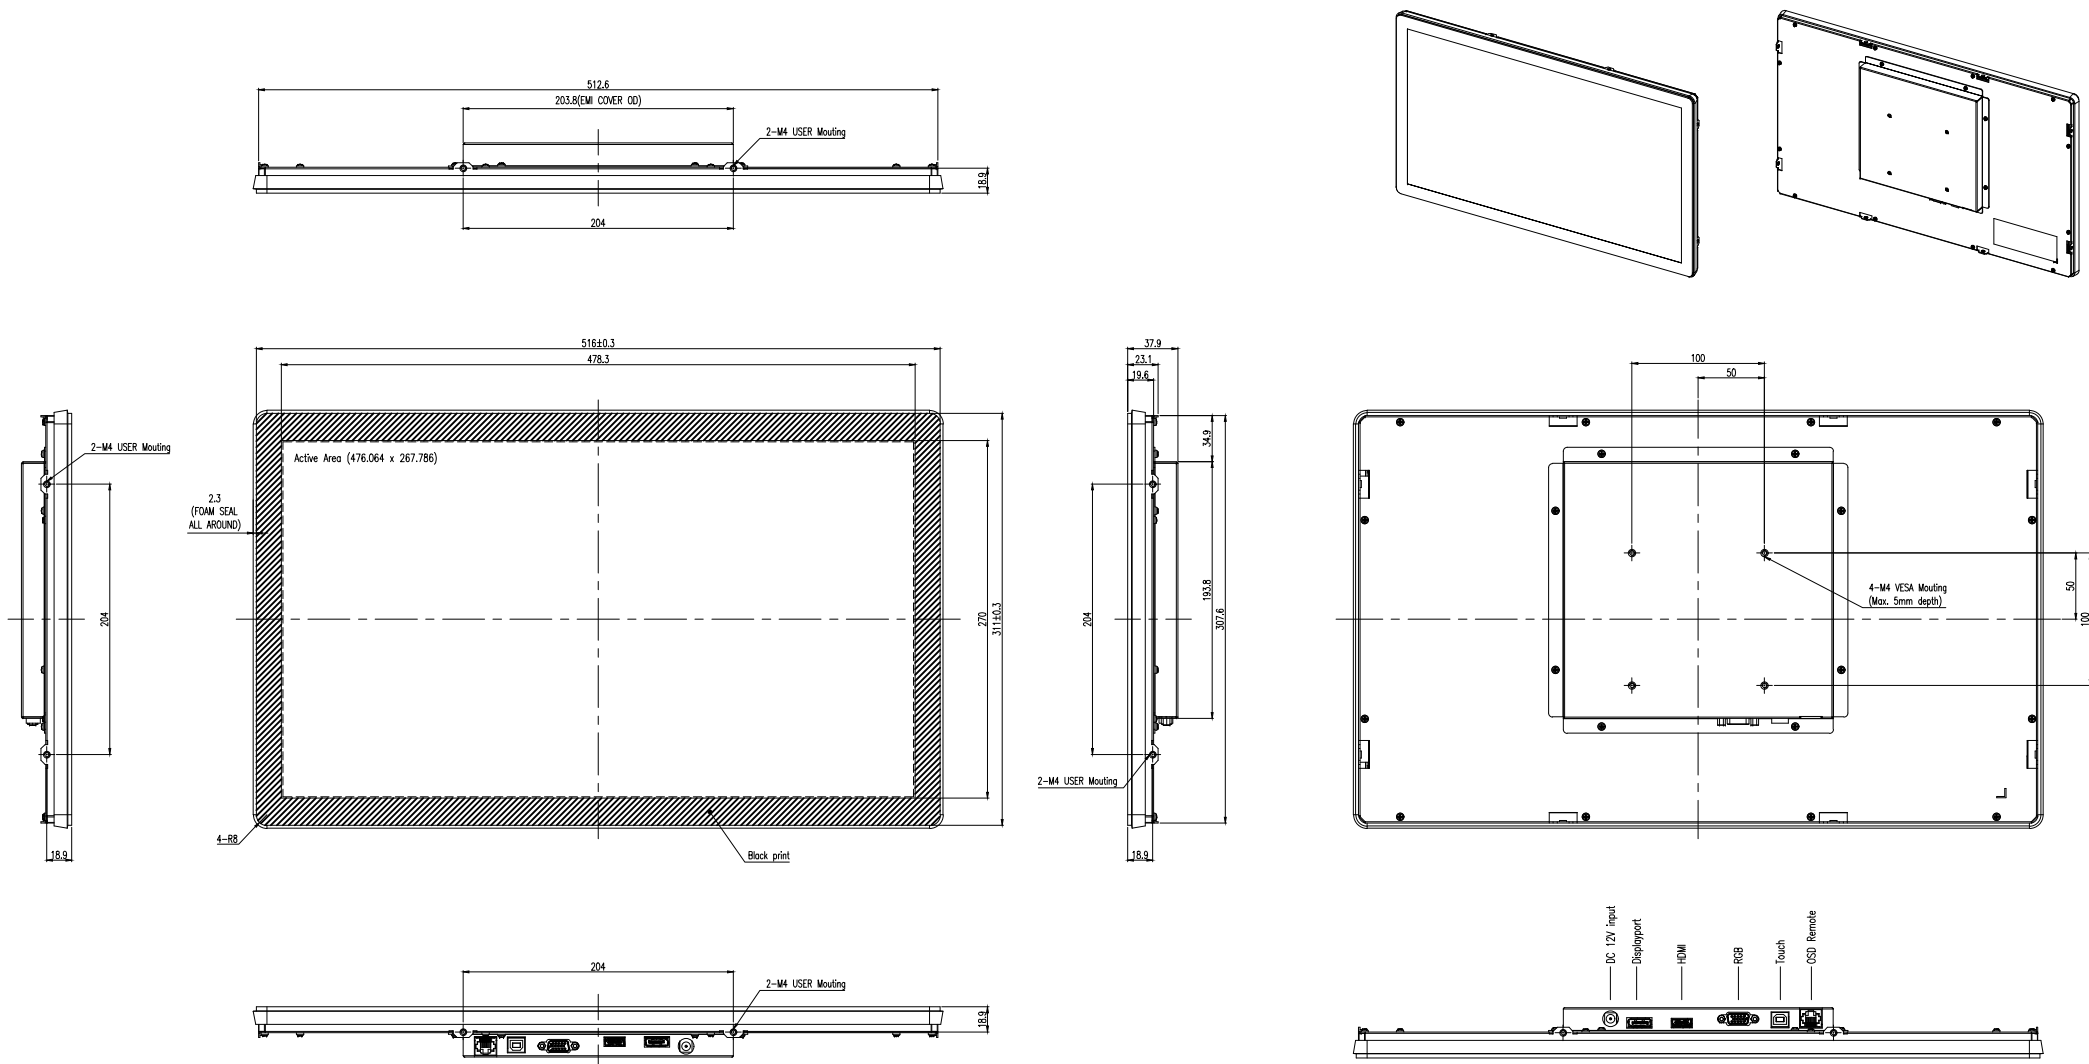

TEMPORARY

NOTE
 1. STANDARD TOLERANCES : ±0.5
 2. NO SCRATCH, BURR & CRACK
 3. COLOR : ALL BLACK

1			
NO.	DESCRIPTION	Q'TY	REMARK
	21.5" OPEN FRAME		
MAT'L	EG		

Q'TY	1ea / 1set	SCALE	1 / 1	APPROVED	TITLE	215 OTS
REVISION	Sample 0.90	PROJECTION		CHECKED	BUYER	
				DRAWN	DATE	DWG.NO.
				Sang Min Choi	2021. 02. 17	

